



Riehle


*think process!*



Lye application  
machine  
**Allround**

Artisan High Speed!  
The fastest lye application machine in its class!

**WP** BAKERYGROUP

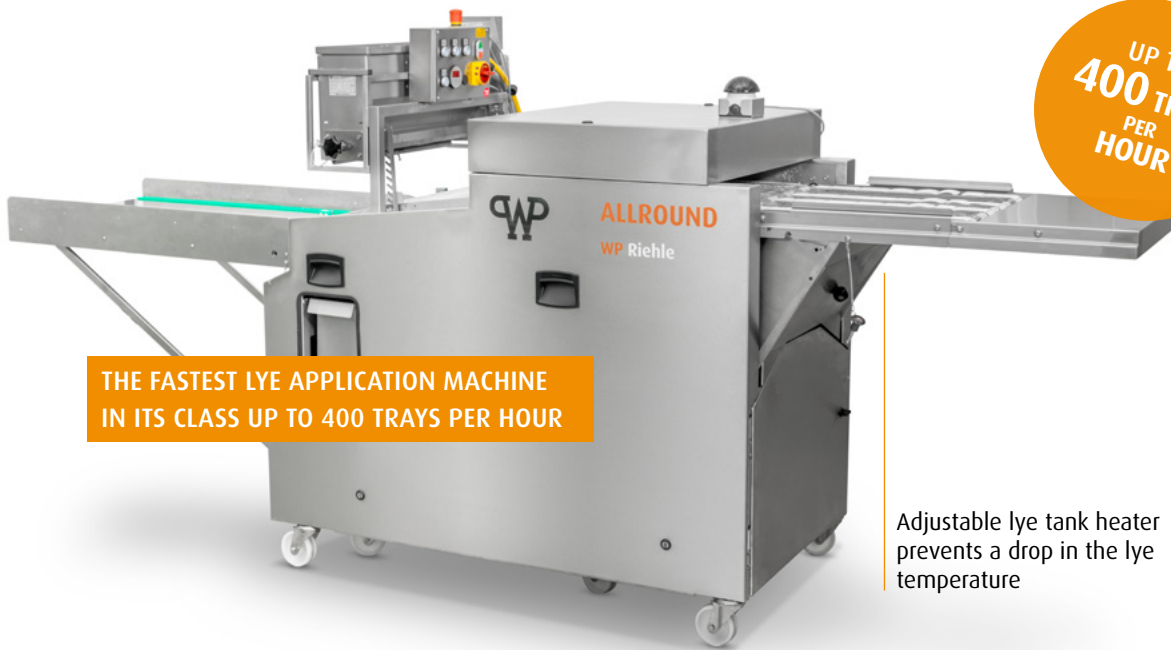

**THE FASTEST LYE APPLICATION MACHINE  
IN ITS CLASS UP TO 400 TRAYS PER HOUR**

**UP TO  
400 TRAYS  
PER  
HOUR**

Adjustable lye tank heater prevents a drop in the lye temperature

## BENEFIT

- even showering results also on high speed because of 2 lye waterfall curtains plus patented WP Riehle lye shower
  - the adjustable tank heating avoids the drop down of the lye temperature and guarantees consistent shine and colour throughout the entire production time
  - computer control for adjustable speed
  - long shower belt enables showering of large products
- New** ■ all process-relevant parts are made of blue plastic
- New** ■ rollable 47 gal lye tank, easily accessible via side flap
- tank lye level sensor prevents pump from running dry
- New** ■ gas springs on the discharge table for easier folding

## OPTIONS

- speedy control enables new feeding while the previous feed is still on the way
- New** ■ flat tray deposit belt prevents prezels from distortion when deposited and keeps baking trays clear from excess toppings
- automatic scattering unit with brush roller, speed adjustable for different scattering toppings
  - exchange toppings container for scattering unit



## TECHNICAL DETAILS

Tray size	18 x 26"
Length operational	121.1"
Length rest position	64.0"
Width	34.6"
exit table height	37.4"
Capacity	up to 400 trays/h
Weight	approx. 793 lb
Voltage 3-ph	208-240 V/60 Hz
max. connected load	6.5 kW 7.0 kW
Lye tank capacity	approx. 47 gal

**WP LEBENSMITTELTECHNIK RIEHLE GMBH**

Heinrich-Rieger-Str. 5 // D-73430 Aalen, Germany // Tel. +49 7361 5580-0 // Fax +49 7361 5580-2281  
info@riehle.de // www.wp-riehle.de